



Catalogue
LAUNDRY
Chapter
IRONING AND FOLDING

Model
P-25/100 M E 400V 3N 50Hz

19074643


19/02/2020

WALL IRONER, P-25/100 M E

- Wall mounted and small in size, they can be positioned in very limited spaces and require hardly any installation since they do not have any kind of exhaust or connection, except to the electric current.
 - Unit exterior in stainless and lacquered steel.
 - Anodised aluminium bucket.
 - Front loading and unloading.
 - Safety protector for hands.
 - Electronic microprocessor for temperature regulation.
 - Safety thermostat.
 - Electric heating system.
 - Automatic movement of the tray.
 - Anodised aluminium tray Roller manufactured in polyester.
 - Tray roller NOMEX in option.
- "Note: You are recommended to insert the linen with a moisture level of between 20 and 25%."

DIMENSIONS

X Width	1552 mm	X Gross width	1462 mm
Y Depth	540 mm	Y Gross depth	423 mm
Z Height	1140 mm	Z Gross height	986 mm
Net Weight	86,0 kg	Gross Weight	104,0 kg
Net volume	0,950 m3	Gross volume	0,610 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	0,18 kW
Electric power	5,130 kW
Amperage (A)	20A
Heating power	4,95 kW
Voltage	400V - 3N
Electric frequency	50Hz

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	4 X 2,5 / 16A
Single-phase 230V wiring	3 X 6 / 25A
Three-phase +N 400V wiring	5 X 2,5 / 10A

OTHERS

Roller length in cm	100,00 cm
Roller diameter	250 mm
Production 20-25 % moisture	30 kg/h
Operational speed	4,20 m/min
Noise level	55,00 dB




Catalogue
LAUNDRY

Chapter
IRONING AND FOLDING

Model
P-25/100 M E 400V 3N 50Hz

19074643

19/02/2020

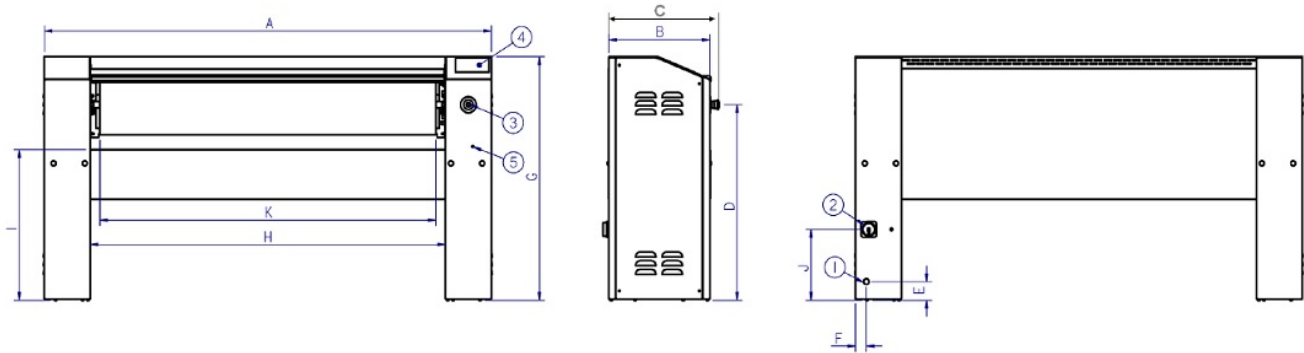

01. Conexión eléctrica
02. Main switch
03. Parada de emergencia
04. Panel de control
05. Acceso inverter mantenimiento

01. Electrical connection
02. Main switch
03. Emergency stop
04. Control panel
05. access to inverter maintenance

01. Connexion électrique
02. Sectionneur
03. Arrêt d'urgence
04. Panneau de commande
05. accès motoréducteur maintenance

	A	B	C	D	E	F	G	H	I	J	K
P-25/100	1.462	423	485	791	75	45	986	1.079	610	287	998
P-25/120	1.662	423	485	791	75	45	986	1.279	610	287	1.198
P-25/140	1.862	423	485	791	75	45	986	1.479	610	287	1.398