



D 200	
	200 l
1:18	11 kg
1:20	10 kg

### Features

- Precise residual moisture measurement
- Fast drying times
- Low energy consumption
- High efficiency through axial-radial air flow
- Convenient loading/unloading through large door
- Optimised waste heat recovery
- Intuitive touch operation with 4.3" colour display
- Expert control
- 24 languages
- 18 standard drying programmes
- Time preset
- Time drying
- Crease protection
- Reversing drum
- Stainless steel drum
- Maintenance-free direct drive
- Robust construction for high durability
- Powder-coated steel housing, matt grey
- Quietness < 70 db(A)
- Fluff filter drawer
- Removable of bottom front panel to access with fork lift

### Options

- Expert+ control
- Integrated prepaid card system
- Potential-free contact for external ventilation control
- Central fresh air intake 200 mm
- Central fresh air intake 160 mm
- Air vent 160 mm
- artLine (anthracite)
- Stainless steel housing
- Door hinge left or right
- Fluff filter drawer, lockable
- Machine plinth 270 mm

### Features and benefits



- Fast drying time (32 min)
- Energy-efficient
- Durable and robust
- Low-maintenance



- Swiss made
- Intuitive operation
- profiClean and wetClean programmes
- Quiet



- Product options
- Configuration tool

# proLine D200 technical data

Company or brand name	Schulthess	
<b>Appliance type</b>	<b>Dryer</b>	
<b>Type or sales description</b>	<b>proLine</b>	<b>D200</b>
Product No	4253	

## Eigenschaften

Load (1:18)	kg	11
Load (1:20)	kg	10
Drum capacity	l	200
Drum diameter	mm	728
Drum depth	mm	480
Diameter of filling aperture	mm	580
Evaporation rate	l/min	0,17
Drying rate	kg/h	20
Energy consumption <sup>1)</sup>	kWh / kWh/kg	6,25 / 0,57

## Programmes

Programme duration <sup>1)</sup>	min	32
----------------------------------	-----	----

## Ventilation installation

Extraction rate (max.)	m <sup>3</sup> /h	480
Air outlet	Ø mm	200
Cable resistance on site	max. Pa	200

## Dimensions

Width	mm	790
Height	mm	1350
Height with plinth	mm	1630
Depth	mm	900

## Electric connection


Supply voltage	V	400 3N~
Connected load	kW	15
Heat output	kW	14,4
Performance Drive	kW	0,6
Fuse protection	AT	25

## Safety and maintenance

Complies with Swiss safety regulations	yes	
Complies with the European Machinery Directive	2006 / 42 / EC	
Warranty	Year	1
Maintained by	authorized dealer	
Name and address of manufacturer	Schulthess Maschinen AG CH-8633 Wolfhausen	
Country of origin	Switzerland	

- 1 Electrical connection
- 2 Main switch
- 3 Emergency stop button
- 4 Type plate
- 5 Air outlet

Explanations • available – not available  
1) Cotton cabinet dry 2%, output moisture 47%

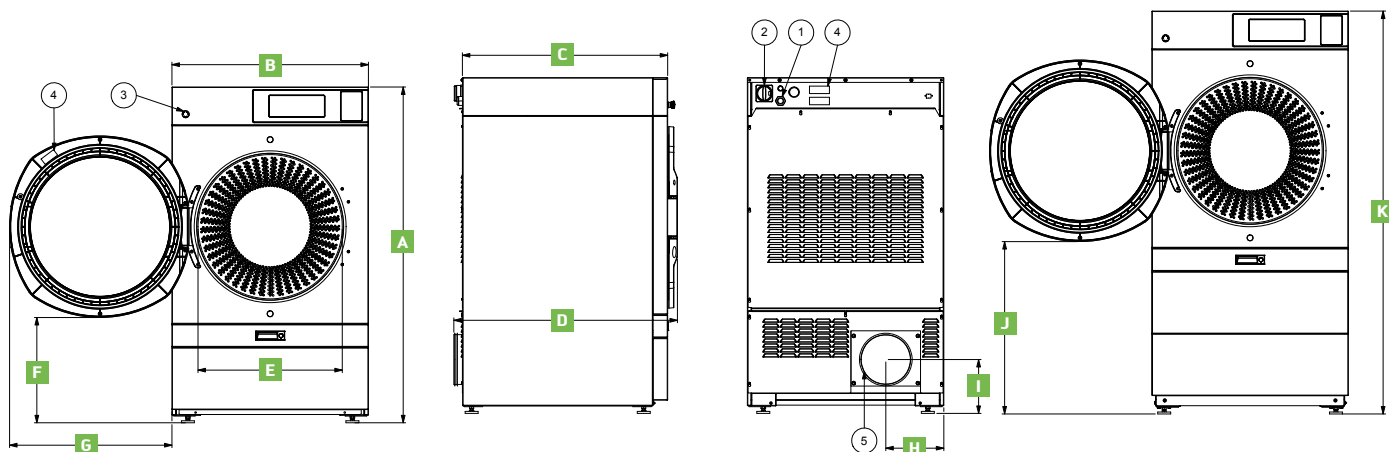

## Dimensions

	A	B	C	D	E	F	G	H	I	J	K	Weight (kg)
<b>D 200</b>	1350	790	825	900	580	425	655	235	220	695	1620	196