



**Catalogue**  
LAUNDRY  
**Chapter**  
DRYERS

**Model**  
SR-16 TP2 HP 400V 3N 50Hz

18003174

14/02/2020

**ADVANCE HEAT PUMP DRYER, SR-16 TP2 HP**

**KEY FEATURES:**

**01. HEAT PUMP**

Its technology makes it ideal for installation in places without access to the exterior of the building and for the self-service sector, and its design considerably simplifies installation.

**OPL <-> SELF-SERVICE**

The machines can be converted from OPL to Selfservice and vice versa from the TP2 control.

- TOUCH PLUS CONTROL: colour touchscreen 4,3'.
- External steel casing with grey coating (skinplate), stainless steel, easy to clean finish.
- Large loading door (180° opening).
- Reverse spin as standard on all models.
- Stainless steel drum as standard.
- Soft Touch: Axially and radially perforated drum for the gentle treatment of fabrics, and achieving improved air circulation.
- Lint filter at the bottom, more ergonomic, larger and improved airflow.
- Anti-wrinkle system.
- 100% air recirculation: Do not require a vapour outlet to the outside. It use water for refrigeration, which can be reused during washing. Low energy consumption.

**OPTIONS:**

- Reverse opening door.
- Stainless steel casing.
- Stainless steel front.
- Wooden packaging.
- Air intake filter.
- Fluff filter.
- Tropicalised electronics.
- WI-FI
- Printer.
- Dosing.
- Double glazed door.
- 7" Screen.
- iDry System (Intelligent moisture sensor + temperature control at the drum entrance).
- FK System (Integrated fire prevention system).

**Placement of the door:**


Door center height: 976 mm  
Door base height: 618 mm  
Door opening diameter: 574 mm

\* Drying conditions: Complete loading (1/30) of towels, drying temperature 70°C.

\*\*\* kg dry clothes per hour. Drying conditions: Complete loading (1/30) of towels, drying temperature 70°C.

"

**DIMENSIONS**



X Width	785 mm	X Gross width	865 mm
Y Depth	1525 mm	Y Gross depth	1650 mm
Z Height	1694 mm	Z Gross height	1840 mm
Net Weight	357,0 kg	Gross Weight	372,0 kg
Net volume	2,030 m3	Gross volume	2,626 m3

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Engine power	0,37 kW
Fan Motor Power	0,55 kW
Electric power	4,770 kW
Amperage (A)	6,9
Heating power	4,00 kW
Voltage	400V - 3N
Electric frequency	50Hz

**AIR TECHNICAL SPECIFICATIONS**

Maximum airflow	1200 m3/h
-----------------	-----------

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Three-phase +N 400V wiring	5 X 4 / 20A
Water inlet diameter	1/2"
	1/2"
Drain 1 diameter	1/2"
Ø Condensed	3/4"

**OTHERS**

Load capacity 1/18	18,30 kg
Load capacity 1/20	16,50 kg
Drum volume	330 L
Drum diameter	750 mm
Drum depth	746 mm
Hourly Output **	12,2 kg/h
Evaporation capacity *	6,3 L/h
Noise level	64,00 dB




Catalogue  
**LAUNDRY**

Chapter  
**DRYERS**

Model  
**SR-16 TP2 HP 400V 3N 50Hz**

18003174

14/02/2020

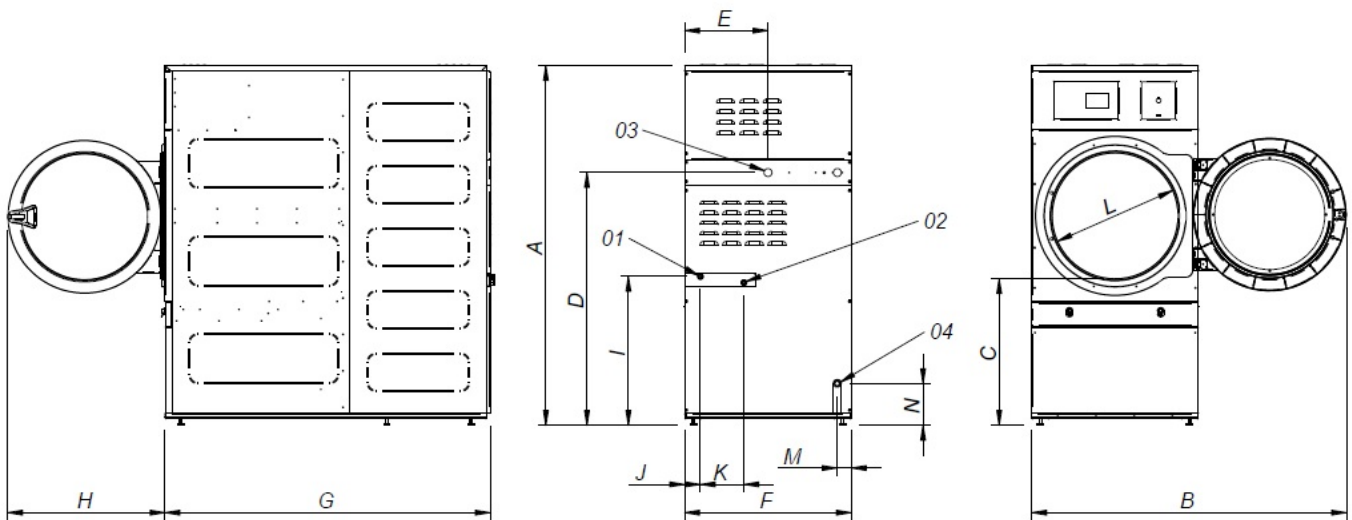

01 ENTRADA AGUA REFRIGERACION (RED) 1/2"  
02 SALIDA AGUA REFRIGERACION (CALIENTE) 1/2"  
03 ACOMETIDA ELÉCTRICA  
04 DESAGÜE 3/4"

01 REFRIGERATION WATER INLET 1/2"  
02 REFRIGERATION WATER OUTLET (HOT) 1/2"  
03 ELECTRIC CONNECTION  
04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
SR-11 HP	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
SR-16 HP	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
SR-23 HP	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250