



Catalogue

Chapter

Model

SR-23 TP2 HP 400V 3N 50Hz

18003175

14/02/2020

ADVANCE HEAT PUMP DRYER, SR-23 TP2 HP

KEY FEATURES:

01. HEAT PUMP

Its technology makes it ideal for installation in places without access to the exterior of the building and for the self-service sector, and its design considerably simplifies installation.

OPL <-> SELF-SERVICE

The machines can be converted from OPL to Selfservice and vice versa from the TP2 control.

- TOUCH PLUS CONTROL: colour touchscreen 4,3'.
- External steel casing with grey coating (skinplate), stainless steel, easy to clean finish.
- Large loading door (180° opening).
- Reverse spin as standard on all models.
- Stainless steel drum as standard.
- Soft Touch: Axially and radially perforated drum for the gentle treatment of fabrics, and achieving improved air circulation.
- Lint filter at the bottom, more ergonomic, larger and improved airflow.
- Anti-wrinkle system.
- 100% air recirculation: Do not require a vapour outlet to the outside. It use water for refrigeration, which can be reused during washing. Low energy consumption.

OPTIONS:

- Reverse opening door.
- Stainless steel casing.
- Stainless steel front.
- Wooden packaging.
- Air intake filter.
- Fluff filter.
- Tropicalised electronics.
- WI-FI
- Printer.
- Dosing.
- Double glazed door.
- 7" Screen.
- iDry System (Intelligent moisture sensor + temperature control at the drum entrance).
- FK System (Integrated fire prevention system).

Placement of the door:


Door center height: 1030 mm
 Door base height: 672 mm
 Door opening diameter: 574 mm

* Drying conditions: Complete loading (1/30) of towels, drying temperature 70°C.

*** kg dry clothes per hour. Drying conditions: Complete loading (1/30) of towels, drying temperature 70°C.

"

DIMENSIONS



| | | | |
|------------|----------|----------------|----------|
| X Width | 890 mm | X Gross width | 970 mm |
| Y Depth | 1595 mm | Y Gross depth | 1720 mm |
| Z Height | 1812 mm | Z Gross height | 1940 mm |
| Net Weight | 380,0 kg | Gross Weight | 395,0 kg |
| Net volume | 2,570 m3 | Gross volume | 3,237 m3 |

ELECTRICITY TECHNICAL SPECIFICATIONS

| | |
|--------------------|-----------|
| Engine power | 0,37 kW |
| Fan Motor Power | 0,55 kW |
| Electric power | 4,770 kW |
| Amperage (A) | 6,9 |
| Heating power | 4,00 kW |
| Voltage | 400V - 3N |
| Electric frequency | 50Hz |

AIR TECHNICAL SPECIFICATIONS

| | |
|-----------------|-----------|
| Maximum airflow | 1200 m3/h |
|-----------------|-----------|

CONNECTIONS TECHNICAL SPECIFICATIONS

| | |
|----------------------------|-------------|
| Three-phase +N 400V wiring | 5 X 4 / 20A |
| Water inlet diameter | 1/2" |
| Drain 1 diameter | 1/2" |
| Ø Condensed | 3/4" |

OTHERS

| | |
|------------------------|-----------|
| Load capacity 1/18 | 25,60 kg |
| Load capacity 1/20 | 23,00 kg |
| Drum volume | 460 L |
| Drum diameter | 855 mm |
| Drum depth | 800 mm |
| Hourly Output ** | 13,6 kg/h |
| Evaporation capacity * | 6,9 L/h |
| Noise level | 64,00 dB |




Catalogue

Chapter

Model
SR-23 TP2 HP 400V 3N 50Hz

18003175

14/02/2020

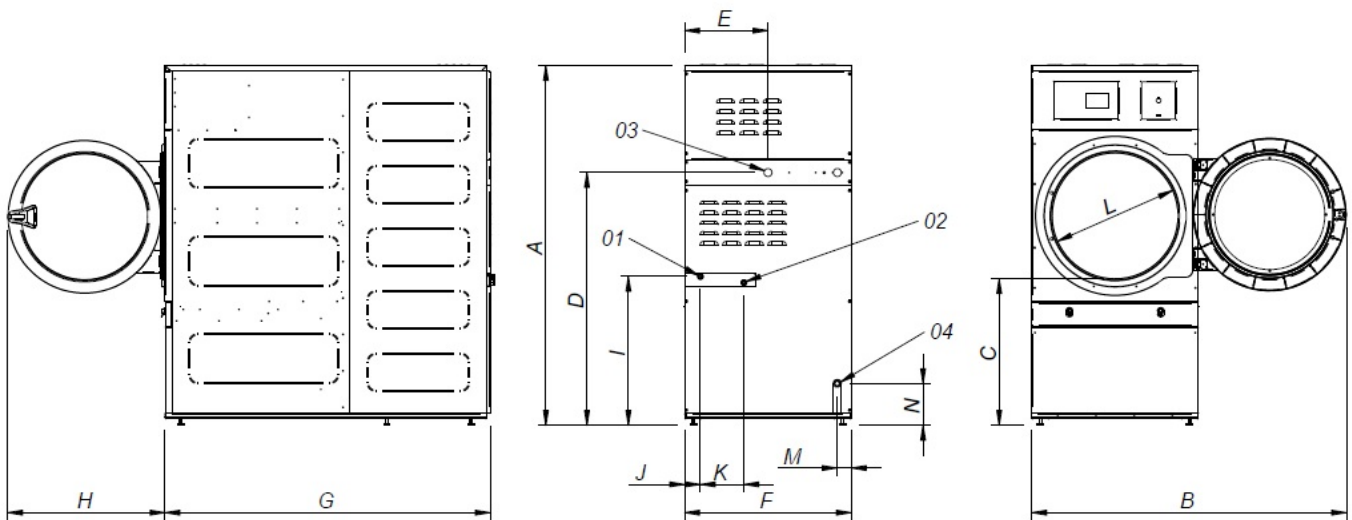

01 ENTRADA AGUA REFRIGERACION (RED) 1/2"
02 SALIDA AGUA REFRIGERACION (CALIENTE) 1/2"
03 ACOMETIDA ELÉCTRICA
04 DESAGÜE 3/4"

01 REFRIGERATION WATER INLET 1/2"
02 REFRIGERATION WATER OUTLET (HOT) 1/2"
03 ELECTRIC CONNECTION
04 DRAIN 3/4"

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N |
|----------|------|------|-----|------|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|
| SR-11 HP | 1694 | 1447 | 689 | 1190 | 392 | 785 | 1255 | 735 | 700 | 75 | 205 | 575 | 67 | 197 |
| SR-16 HP | 1694 | 1447 | 689 | 1190 | 392 | 785 | 1525 | 735 | 700 | 75 | 205 | 575 | 67 | 197 |
| SR-23 HP | 1812 | 1552 | 743 | 1190 | 445 | 890 | 1595 | 735 | 700 | 127 | 205 | 575 | 119 | 250 |