



**Catalogue**  
LAUNDRY  
**Chapter**  
WASHING

**Model**  
LA-14 TP2 S 230V 1N 50/60Hz

18001979

12/05/2020

**HIGH SPIN WASHER EXTRACTOR, LA-14 TP2 S**


- Unit exterior manufactured in skin plate, colour grey, stainless steel appearance. Easy to clean and anti fingerprint.
- Drum and jacket in AISI-304 stainless steel.
- 8 automatic liquid dosing signals, with programmable time and delay. 6 extra signals available optionally.
- 3 standard water inlets.
- Variable-frequency drive (standard 50-60 Hz). Balancing system controlled by the same drive.
- New second-generation TOUCH PLUS programmer with 7" touch screen, 37 available languages and which lets you create an indefinite number of programs (29 pre-set), even play videos.
- Traceability as standard: the whole wash process (temperatures, water levels) is stored on the washer and is extractable to a PC by USB memory.
- Allows programming, importing and exporting of programs and software updates via USB.
- WET CLEANING characteristics included in the scheduler (modifiable water levels and washing speed).
- EFFICIENT MIX. These machines are equipped with an automatic water mixer (mixing different water temperatures) which provides energy savings and reduces washing times.
- BALANCE CONTROL. The washers detect the imbalance at an early stage. This way the operation is much smoother, elongating components lifetime and reducing washing times, thus saving energy as well.
- MULTICHOICE INLET. All washers are equipped with a third water inlet as standard, which allows you to save filling time, or which can be used for decalcified water, ozone or recycled water.
- MAINTENANCE KARE. A simple and reliable design with easy-to-access mechanical parts.
- OPTIMIZED DRUM. The effective design of the drum and tank allows the energy consumption necessary to heat the water, as well as the superfluous use of chemical products, to be reduced.
- OPTIMAL CONSUMPTION: Efficient system by means of which you can indicate the load which is introduced in the machine. The washer automatically adapts the quantity of water and chemicals to be used for that load.
- LOADING AID system. Water inlet and spin control for loading the linen.
- CE, WRAS and EAC product certifications.
- Optional ETL-certified version of the machine.
- Tank with 4 detergent compartments.
- The standard model can be converted to self-service by installing a pay station kit, coin mechanism kit or other payment system. RS-485 communication.
- Washers compatible with water recovery tanks.
- Maximum water consumption calculated in Programme nr. 20, 75% of loading.

**OPTIONS:**

- Reversible door.
- Automatic unblockage of the door.
- Tropicalised programmer.
- Levelling feet.
- Printer.
- Recirculation.
- Silicone seal of the door.
- Extra dosage.
- Automatic weighing

**DIMENSIONS**

X Width	788 mm	X Gross width	820 mm
Y Depth	869 mm	Y Gross depth	1010 mm
Z Height	1307 mm	Z Gross height	1560 mm
Net Weight	250,0 kg	Gross Weight	283,0 kg
Net volume	0,895 m3	Gross volume	1,292 m3



**ELECTRICITY TECHNICAL SPECIFICATIONS**

Engine power	1,10 kW
Electric power	1,100 kW
Amperage (A)	4,7
Voltage	230V - 1N
Electric frequency	50/60Hz

**STEAM TECHNICAL SPECIFICATIONS**

Steam consumption	8,50 kg/h
-------------------	-----------

**WATER TECHNICAL SPECIFICATIONS**

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	88,80 l/h

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X1,5+T 10A
Steam entrance diameter	1/2"
Water inlet diameter	3/4"
Drain 1 diameter	3"
Drainage capacity	200 l/min

**OTHERS**

Load capacity 1/9	14,00 kg
Load capacity 1/10	13,00 kg
Drum volume	130 L
Drum diameter	620 mm
Drum depth	430 mm
Wash speed	50,0 r.p.m.
Max revolutions	1138 r.p.m.
G Factor	450
Fuerza máxima transmitida (kN)	2,49 ±1,05
Frequency of dynamic load (Hz)	16,70
Noise level	< 70,00 dB





Catalogue  
**LAUNDRY**

Chapter  
**WASHING**

Model  
**LA-14 TP2 S 230V 1N 50/60Hz**

18001979

12/05/2020

- Stainless steel unit.
- Stainless steel front.
- Drain normally closed.
- Double drain.
- Drain pump.

Door position:

Height door centre: 700 mm

Height door base: 440 mm

"Working diameter of the door: 373 mm

"




Catalogue  
**LAUNDRY**

Chapter  
**WASHING**

Model  
**LA-14 TP2 S 230V 1N 50/60Hz**

18001979

12/05/2020

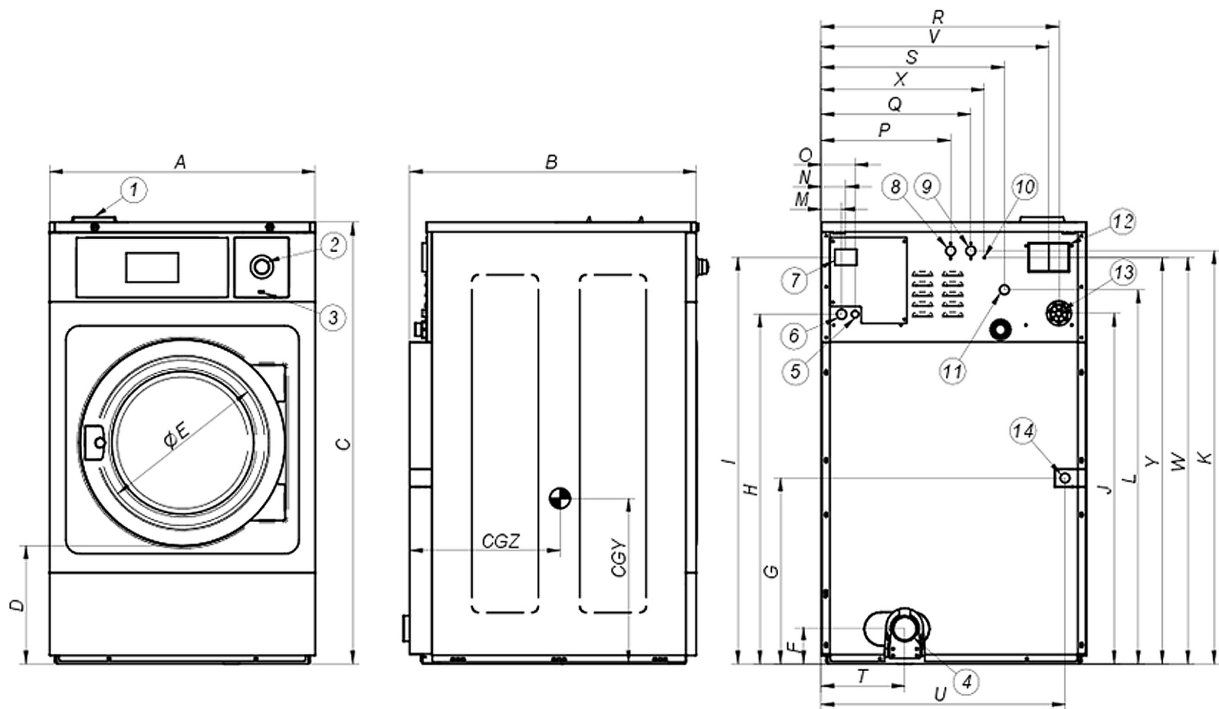

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
<b>LA-11 TP2</b>	692	788	1.185	370	373	125	354	913	1.085	916	1.100	985	61	74	101	316	371	610	448	226	626	580	1.080	461	1.145	424	577
<b>LA-14 TP2</b>	788	869	1.307	440	373	243	385	1.034	1.202	1.037	1.221	1.106	61	74	101	385	445	706	544	243	718	676	1.202	485	1.201	450	651
<b>LA-18 TP2</b>	884	913	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	802	640	348	814	772	1.303	569	1.297	464	702

- |  |  |
|--|--|
| 01. Jabonera                                     | 01. Detergent box                            |
| 02. STOP paro de emergencia                      | 02. STOP Emergency button                    |
| 03. Puerto USB                                   | 03. USB port                                 |
| 04. desagüe                                      | 04. Drain                                    |
| 05. Conexión eléctrica a bombas de jabón líquido | 05. Electrical connection for soap dispenser |
| 06. Conexión eléctrica                           | 06. Electrical inlet                         |
| 07. Interruptor general                          | 07. Main switch                              |
| 08. Entrada de agua auxiliar                     | 08. Auxiliary water inlet                    |
| 09. Entrada de agua caliente                     | 09. Hot water inlet                          |
| 10. Toma de tierra                               | 10. Ground connection                        |
| 11. Entrada de agua fría                         | 11. Cold water inlet                         |
| 12. Rebosadero de agua                           | 12. Overflow                                 |
| 13. Conexión para jabón líquido                  | 13. Connection for liquid soap               |
| 14. Conexión de vapor                            | 14. Steam inlet                              |